



LIGHTING KIT TF NI9



CHARACTERISTICS

- Zinc plated telescopic mast
- Hydraulic raise/lower
- 340 degrees manual rotation of the tower
- Wind proof up to 80 km/h with generator having weight ≥ 210 kg
- Safety valve for lowering the tower in case of hydraulic system failure
- Two axes manually adjustable floodlights
- Switches to on/off for lamps
- Site tow trailer structure
- 2 x pneumatic wheels with mudguards
- Safety lock
- 4 x adjustable stabilisers, two extendable
- Lifting hooks and forklift pockets
- Frame prepared for installing a generating set from 8 to 20 kVA
- Meets EC directives

TRANSPORT



TRUCK 13.60 m	5 towers
CONTAINER 12 m	4 towers
CONTAINER 5 m	2 towers



VERSIONS ON REQUEST


- /




AVAILABLE LAMPS

- TF NI9 A-6x1500: 6 HALOGEN
- TF NI9 J-4x1000: 4 METAL HALIDE
- TF NI9 L-4x300: 4 LED


TF NI9 A-6x1500

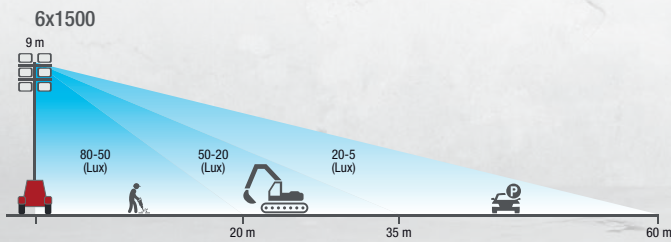

TF NI9 J-4x1000

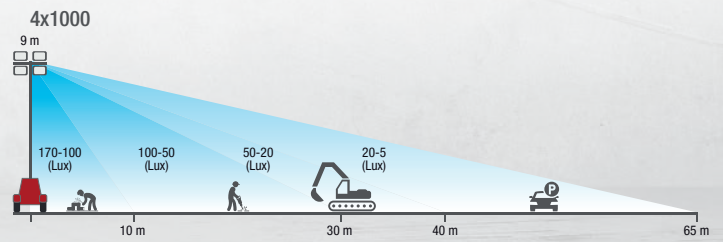

TF NI9 L-4x280

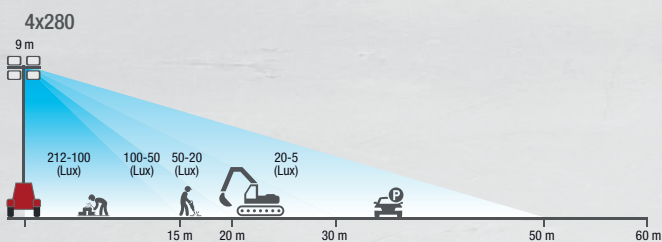




TECHNICAL DATA

DIMENSIONS AND WEIGHT:

	TF NI9 A-6X1500		TF NI9 J-4X1000		TF NI9 L-4X300	
	tower closed	tower open	tower closed	tower open	tower closed	tower open
Width (mm)	1410	1975	1410	1975	1410	1975
Length (mm)	3920	3920	3920	3920	3920	3920
Height (mm)	2240	9000	2240	9000	2240	9000
Weight (Kg)	790		790		790	

FEATURES

	TF NI9 A-6X1500	TF NI9 J-4X1000	TF NI9 L-4X300
Illuminated area	4200 mq	4200 mq	4200 mq
Lux average	16	21	21
Total lumen	216000	340000	130000

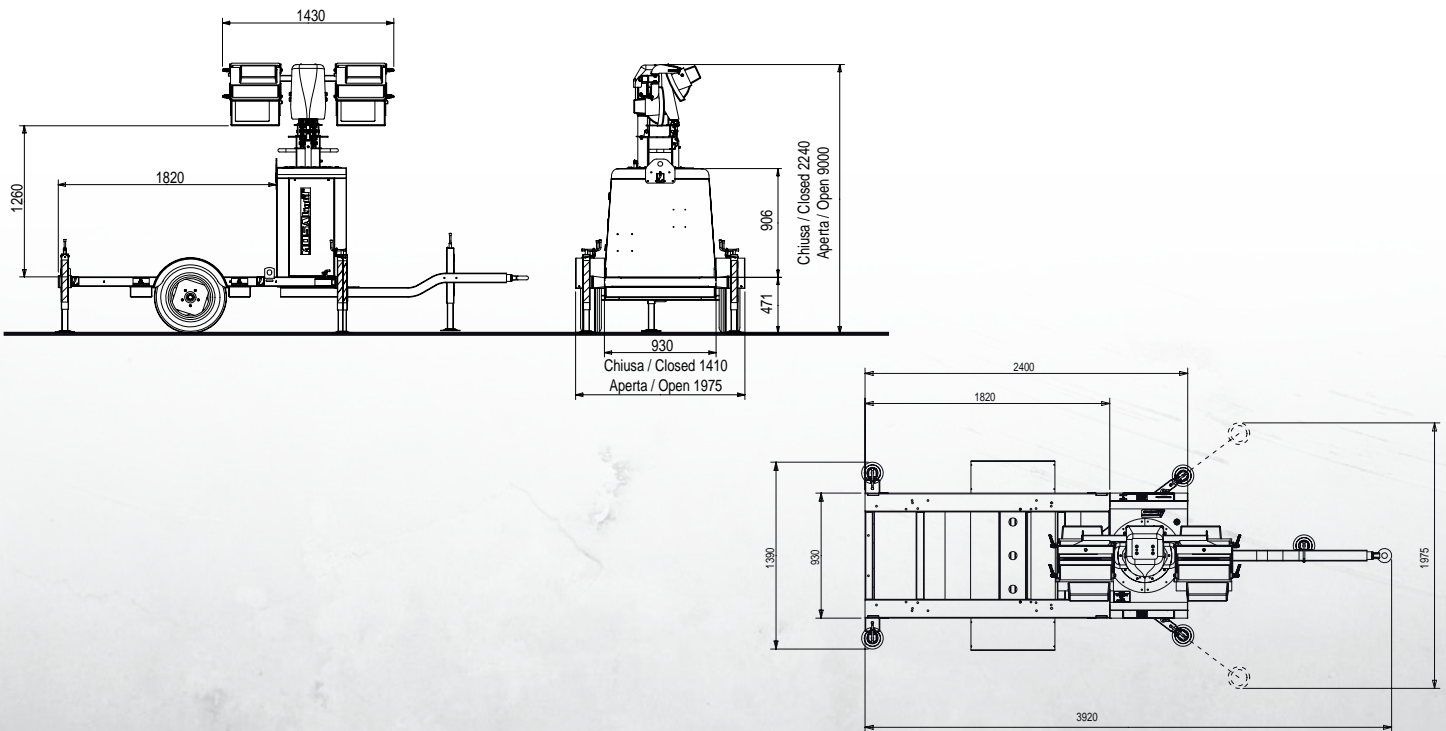

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machines Directive)
- 2014/35 / EU (Low Voltage Directive)
- 2014/30 / EU (EMC Directive)
- 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
- ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2015 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax +39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

